




WA 122

Ultra-wide Coverage Full Range Loudspeaker

Features:

- 12" Full range Loudspeaker
- 150° Ultra-wide horizontal coverage

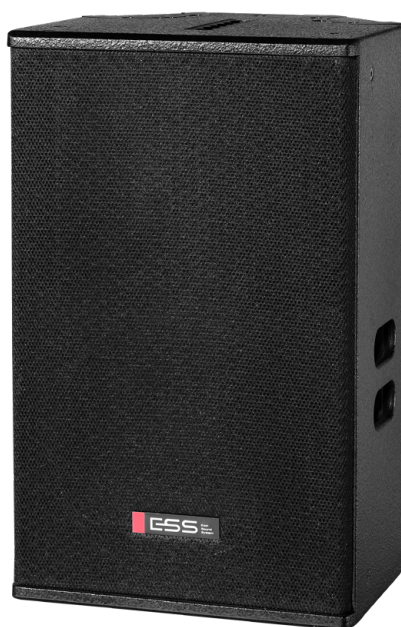

Technical Specifications:

Technical Parameters	WA122
Frequency Response	55 Hz -18KHz±3dB
Coverage	Hor: 150° , Ver: 90° (WA122-9) Hor: 150° , Ver: 40° (WA122-4)
Components	12" 76mm Voice coil High-sensitivity Neodymium LF driver *1 3" Voice coil Neodymium HF driver *1
Recommended Amplifier	800W
Nominal Impedance	8Ω
Sensitivity (1W/1M)	101dB
Max. SPL	133dB
Connectors	2×NEUTRIK NL-4
Installation manner	Bracket seat *1, Pre-embedded M8 flying nuts *12, top and bottom with fast flying slots. For stage monitor Loudspeaker, angle of cabinet and ground:0° ,15° ,30° , 45° and 60° adjustable
Dimension (H×W×D)	640mm×396mm×360mm
Weight	25Kg